

# Conoly



NY-01



NY-02



NY-03



NY-04



NY-05



NY-06



NY-07



NY-08



NY-09



NY-10



NY-11



NY-12



NY-13



NY-14



NY-15



FIRE  
RETARDANT



QUICK  
SHIP

*\* Colors shown are indicative references only and will vary dependent on screen resolution*

**NUVRINO**  
artistic synthetic leather

[www.nuvrino.com](http://www.nuvrino.com)

**HEAD OFFICE : PT. BERKAT UNGGUL PRATAMA**

Komplek Citta Graha, Jl. Panjang No. 26 Blok 2L | Jakarta 11520 - Indonesia | +62 21 5819089


**SHOWROOM : LEDER HAUS**

**JAKARTA** • Komplek Cipete Square, Jl. Cipete Raya 55 No.7 | Jakarta 12410 - Indonesia | +62 21 75900 679

**BANDUNG** • Komplek Batununggal Indah, Jl. Batununggal Indah Raya No. 415 | Bandung 40266 - Indonesia | +62 22 8730 7759

**BALI** • Komplek Istana Kuta Galeria, Jl. Patih Jelantik, Blok PM1 No.6 | Kuta, Badung, Bali 80361 - Indonesia | +62361 4752 806

# PATTERN ILLUSTRATION

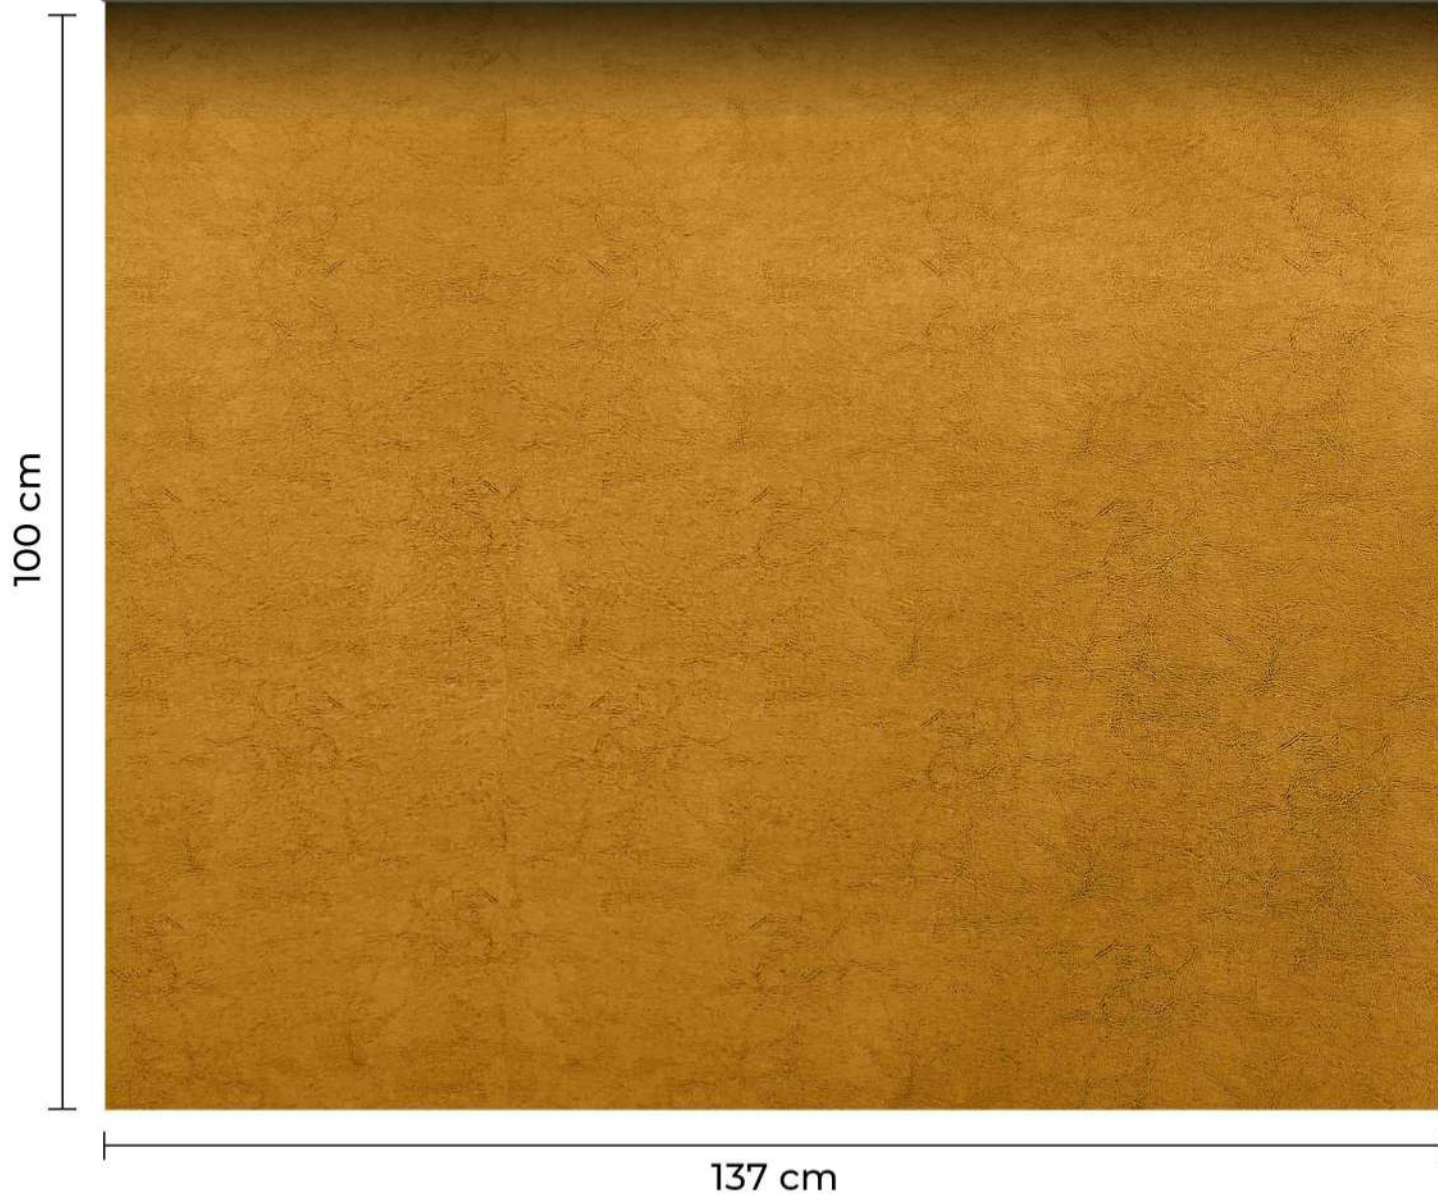

## APPLICATIONS



Dining Chair



Office Chair



Sofa

# CONOLY

### DESCRIPTION

Named after the Irish word for "wise," Conoly features rich, conservative hues that convey a sense of maturity and wisdom. The deep, sophisticated colors reflect a timeless elegance suitable for both classic and modern interiors. This synthetic leather adds a distinguished touch to any setting, combining refined aesthetics with practical durability.

### SPECIFICATIONS

|                        |                         |
|------------------------|-------------------------|
| Thickness              | 1.20 mm                 |
| Width                  | 137 cm                  |
| Special Surface Finish | Smooth Grain            |
| Composition            | PVC & Knitted Polyester |
| Usage                  | Indoor Upholstery       |
| Repeat                 | No                      |

### PERFORMANCE

|                |             |
|----------------|-------------|
| Abrasion       | 30.000 rubs |
| Fire Retardant | CA-117      |

### ENVIRONMENTAL SUSTAINABILITY

|                   |             |
|-------------------|-------------|
| AZO Dye Free      | ISO 14362-1 |
| Formaldehyde Free | ISO 14184-1 |
| Chromium Free     | ISO 17075-1 |

|                                    |              |                                    |
|------------------------------------|--------------|------------------------------------|
| Abrasion                           | ASTM - D4966 | 30.000 rubs                        |
| Tensile Strength                   | ASTM - D751  | Warp: 70 kg/3 cm, Weft: 35 kg/3 cm |
| Elongation                         | ASTM - D751  | Warp: Max. 100%, Weft: Max. 200%   |
| Tear Strength                      | ASTM - D2261 | Warp: 3.0 kg, Weft: 3.0 kg         |
| Adhesion Strength                  | ASTM - D751  | Warp: 1.1 kg/3 cm                  |
| Flexibility Strength               | ASTM - D2097 | 400.000 Cycles                     |
| Bursting Test                      | ASTM - D3786 | 11.2 kg/cm <sup>2</sup>            |
| Blocking Test                      | ASTM - D751  | Grade 2                            |
| Color Fastness Test (Rubbing Test) | AATCC 8      | Grade 4                            |

*\* The above tests mentioned are guidelines for synthetic leather used in upholstery but do not necessarily indicate its lifespan. When used in different applications, factors such as the quality of craftsmanship, cleaning methods, proper placement, and handling will all impact its durability.*



THE LEATHER SPECIALIST

## HOW TO CARE FOR SYNTHETIC LEATHER

### **DO's**

What you **SHOULD** do



Use a soft, damp cloth to clean the surface of the material



Rub the surface slowly with intense



If it is stained with a fairly intense dye, try to clean the area with a damp cloth as soon as possible



If there are stains that are still left behind, use a special cleaner for synthetic leather to help remove the stains

### **DONT's**

What you **SHOULDN'T** do



Do not use rough/sharp materials (such as a brush) to clean the surface



Do not use harsh (chemical) cleaning products such as: bleach, detergent, thinner, and others

#### **Note:**

Ink, permanent marker, denim and other strong textile dyes may be difficult or cannot to remove perfectly, especially on light colored synthetic leather



## TEST REPORT

APPLICANT : PT BERKAT UNGGUL PRATAMA  
KOMPLEK CITTA GRAHA  
JL. PANJANG NO.26 BLOK 2L, KEDOYA  
SELATAN, KEBON JERUK, JAKARTA BARAT

DATE : APRIL 17, 2023

ATTN: ENDANG

SUBMITTED SAMPLE SAID TO BE:

SAMPLE DESCRIPTION : FABRIC OF NUVRINO  
BUYERS COMPANY NAME : PT BERKAT UNGGUL PRATAMA  
COUNTRY OF ORIGIN : CHINA, TAIWAN, INDONESIA  
TESTING STAGE : PRODUCTION SAMPLE

\*\*\*\*\*

TESTS CONDUCTED:

AS REQUESTED BY THE APPLICANT, FOR DETAILS REFER TO ATTACHED PAGES.

\*\*\*\*\*

CONCLUSION:

| <u>TESTED SAMPLE</u> | <u>STANDARD</u>                                                                                                           | <u>RESULT</u> |
|----------------------|---------------------------------------------------------------------------------------------------------------------------|---------------|
| SUBMITTED SAMPLE     | CALIFORNIA TECHNICAL BULLETIN 117-2013 SECTION 1 FOR<br>TESTING OF COVER FABRIC MATERIAL USED IN UPHOLSTERED<br>FURNITURE | PASS          |

\*\*\*\*\*

Remark:

Test was conducted with red color as top surface per client confirmation. (See EXH. #1-2)

PREPARED AND CHECKED BY:  
FOR INTERTEK INDONESIA



TAUFIQ URAKHMAN  
HARDLINE LAB MANAGER

RT/AK/IA/RM/IS/DN

The report shall not be reproduced wholly or in parts without written approval of the laboratory.  
Except where explicitly agreed in writing, all work and services performed by Intertek is subject to our General Terms and Conditions.  
For the complete term and condition, please visit : <http://www.intertek.com/terms/>

IUS – TR.HL – 001

PT. Intertek Utama Services

Citrabuana Indoloka Building  
Jl. Cikini IV No.2, Gondangdia  
Jakarta 10330, Indonesia

Telp. (62-21) 391 8584 (Hunting), 391 8574 (Direct), Fax. (62-21) 391 8345  
Hardline Laboratory:  
Jakarta (62-21) 391 8574, Semarang (62-24) 762 7107 / 762 7325  
Email : [hardlines.indonesia@intertek.com](mailto:hardlines.indonesia@intertek.com) Website: [www.intertek.com](http://www.intertek.com)

Page 1 of 4



Tests Conducted:

1 Flammability Test (California Technical Bulletin 117-2013 Section 1: Cover Fabric Test):

Test Method

The apparatus and method of testing were those described in California Technical Bulletin 117-2013, Section 1, for measuring the tendency of upholstery cover fabric to smolder and contribute to fire propagation, when subjected to a smoldering ignition source.

Pass/Fail Criteria

A cover fabric is considered pass or fail based on following criteria:

1. A single mock-up test specimen fails to meet the requirements of this test procedure if any of the following criteria occurs:
  - a) The mock-up test specimen continues to smolder after the 45 minutes test duration;
  - b) A vertical char length (measured as described in step 11.9 of ASTM E1353-08a  $\epsilon 1$ ) of more than 1.8 inches (45 mm) develops on the cover fabric.
  - c) The mock-up test specimen transitions to open flaming.
2. The cover fabric passes the test if three mock-up specimens pass the test. i.e., the cigarettes burn their full length and the mock-ups are no longer smoldering.
3. If more than one specimen fails, the cover fabric fails the test.
4. If any one of the three initial specimens fails, repeat the test on additional three specimens.
5. If all three additional specimens pass the test, the cover fabric passes the test. If any one of the additional three specimens fails, the cover fabric fails the test.

Test Result:

| Initial Test |                                  |                                                                  |                                                         |             |
|--------------|----------------------------------|------------------------------------------------------------------|---------------------------------------------------------|-------------|
|              | Vertical Char length<br>(Inches) | Mock-up specimen<br>continues to<br>smoulder After 45<br>Minutes | Mock-up test<br>specimen transitions<br>to open flaming | Test Result |
| Specimen 1   | 0.4                              | No                                                               | No                                                      | Pass        |
| Specimen 2   | 0.4                              | No                                                               | No                                                      | Pass        |
| Specimen 3   | 0.5                              | No                                                               | No                                                      | Pass        |

Conditioning: At least 24 hours in an atmosphere having a temperature of  $21^{\circ} \pm 3^{\circ} \text{C}$  ( $70^{\circ} \pm 5^{\circ} \text{F}$ ) and less than 55% relative humidity

Conditioning : Temp 20°C, RH 50%

Air Flow Rate Prior to test : 0.1 m/s

Air Flow Rate After test : 0.1 m/s

Remark: No = Was not observed

The report shall not be reproduced wholly or in parts without written approval of the laboratory.  
Except where explicitly agreed in writing, all work and services performed by Intertek is subject to our General Terms and Conditions.  
For the complete term and condition, please visit : <http://www.intertek.com/terms/>



Date Sample Received : April 11, 2023  
Date Modified : April 17, 2023  
Testing Period : April 11, 2023 to April 17, 2023

\*\*\*\*\*

END OF REPORT

*This report is made solely on the basis of your instructions and/or information and materials supplied by you. It is not intended to be a recommendation for any particular course of action. Intertek does not accept a duty of care or any other responsibility to any person other than the Client in respect of this report and only accepts liability to the Client insofar as is expressly contained in the terms and conditions governing Intertek's provision of services to you. Intertek makes no warranties or representations either express or implied with respect to this report save as provided for in those terms and conditions. We have aimed to conduct the Review on a diligent and careful basis and we do not accept any liability to you for any loss arising out of or in connection with this report, in contract, tort, by statute or otherwise, except in the event of our gross negligence or wilful misconduct.*

The report shall not be reproduced wholly or in parts without written approval of the laboratory.  
Except where explicitly agreed in writing, all work and services performed by Intertek is subject to our General Terms and Conditions.  
For the complete term and condition, please visit : <http://www.intertek.com/terms/>

IUS – TR.HL – 001

**PT. Intertek Utama Services**

Citrabuana Indoloka Building  
Jl. Cikini IV No.2, Gondangdia  
Jakarta 10330, Indonesia

Telp. (62-21) 391 8584 (Hunting), 391 8574 (Direct), Fax. (62-21) 391 8345  
Hardline Laboratory:  
Jakarta (62-21) 391 8574, Semarang (62-24) 762 7107 / 762 7325  
Email : [hardlines.indonesia@intertek.com](mailto:hardlines.indonesia@intertek.com) Website: [www.intertek.com](http://www.intertek.com)

Page 3 of 4



Product Photo



The report shall not be reproduced wholly or in parts without written approval of the laboratory.  
 Except where explicitly agreed in writing, all work and services performed by Intertek is subject to our General Terms and Conditions.  
 For the complete term and condition, please visit : <http://www.intertek.com/terms/>

IUS – TR.HL – 001



## TEST REPORT

Report No. : HL30029/2025

Page : 1 of 2

Date : MAR. 12, 2025

## PT BERKAT UNGGUL PRATAMA

KOMPLEK CITTA GRAHA, JL. PANJANG NO.26 BLOK 2L, KEDOYA SELATAN, KEBON JERUK,  
JAKARTA BARAT**The following merchandise was submitted and identified by the applicant as:**Product Description: NUVRINO(\*)-SYNTHETIC LEATHERStyle/Item No.: ALL STYLE**We have tested the submitted sample(s) as requested and the following results were obtained:**Test Requested: For compliance with California Technical Bulletin 117-2013 Requirements,  
Test Procedure and Apparatus for Testing the Smolder Resistance of Materials  
Used in Upholstered Furniture -  
Section 1 Cover Fabric TestTest Method & Result: ---See following sheet(s)---Date of Receipt: Mar. 04, 2025Testing Period: Mar. 04, 2025 ~ Mar. 12, 2025Conclusion: The submitted sample(s) **complies with** the requirements of Section 1.4 for  
Cover Fabric Test of California Technical Bulletin 117-2013.Signed for and on behalf of  
SGS Taiwan Ltd.  
Lawrence Yang  
Asst. Manager

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instruction, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced, except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.

### Test Method & Result:

TB 117-2013 Requirements, Test Procedure and Apparatus for Testing the Smolder Resistance of Materials Used in Upholstered Furniture -

### SEC. 1 Cover Fabric Test

Pass

| Criteria                                                                                                                                                                         | Test 1 | Test 2 | Test 3 |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------|--------|--------|
| 1.4.1a) The mock-up test specimen continues to smolder after the 45 minute test duration;                                                                                        | No     | No     | No     |
| 1.4.1b) A vertical char length of more than 1.8 inches (45 mm) develops on the cover fabric.                                                                                     | No     | No     | No     |
| 1.4.1c) The mock-up test specimen transitions to open flaming.                                                                                                                   | No     | No     | No     |
| 1.4.2. The cover fabric passes the test if three initial mock-up specimens pass the test, i.e., the cigarettes burn their full length and the mock-ups are no longer smoldering. | Yes    | Yes    | Yes    |
| 1.4.3. If more than one initial specimen fails, the cover fabric fails the test.                                                                                                 | N/A    |        |        |
| 1.4.4. If any one of the three initial specimens fails, repeat the test on additional three specimens.                                                                           | N/A    |        |        |
| 1.4.5. If all three additional specimens pass the test, the cover fabric passes the test. If any one of the additional three specimens fails, the cover fabric fails the test.   | N/A    |        |        |

N/A = Not Applicable

**Note:** 1. The content of this report is invalid if it is not presented as the entire report.

2. The decision rule of the statements of conformity is following the ILAC G8:09/2019 by using the simple acceptance decision rule.

### - Picture(s) -



Photo A: Appearance of the sample

--- End of Report ---

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instruction, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced, except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.