



Conoly

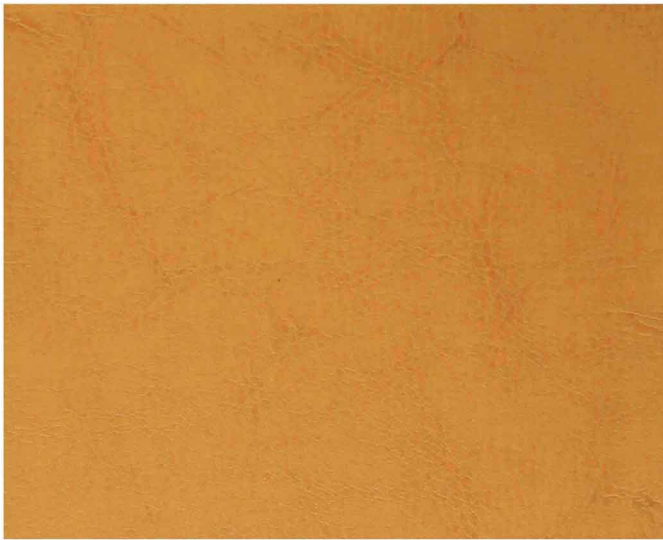

NY-01

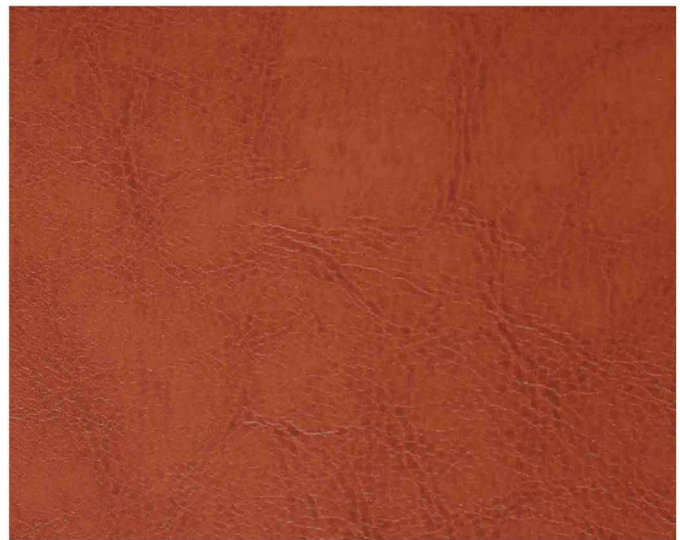

NY-02



NY-03



NY-04



NY-05



NY-06



NY-07



NY-08



NY-09



NY-10



NY-11



NY-12



NY-13



NY-14

SPECIFICATIONS

Thickness	: 1.20 mm
Width	: 137 cm
Abrasion	: 30.000 rubs
Special Surface Finish	: Smooth Grain
Composition	: PVC & Knitted Polyester
Usage	: Indoor Upholstery
Repeat	: No

PERFORMANCE

Flammability	: CA - 117
--------------	------------

*Colors shown are indicative references only and will vary dependent on screen resolution

APPLICATIONS



SOFA



BAG



STATIONERY

NUVRINO
artistic synthetic leather

www.nuvrino.com

HEAD OFFICE : PT. BERKAT UNGGUL PRATAMA

Komplek Citta Graha, Jl. Panjang No. 26 Blok 2L | Jakarta 11520 - Indonesia | +62 21 5819089

SHOWROOM : LEDER HAUS

JAKARTA • Komplek Cipete Square, Jl. Cipete Raya 55 No.7 | Jakarta 12410 - Indonesia | +62 21 75900 679

BANDUNG • Komplek Batununggal Indah, Jl. Batununggal Indah Raya No. 415 | Bandung 40266 - Indonesia | +62 22 8730 7759

BALI • Komplek Istana Kuta Galeria, Jl. Patih Jelantik, Blok PM1 No.6 | Kuta, Badung, Bali 80361 - Indonesia | +62361 4752 806

PATTERN ILLUSTRATION

100 cm



137 cm

APPLICATIONS



Dining Chair



Office Chair



Sofa

TEST REPORT

APPLICANT : PT BERKAT UNGGUL PRATAMA
KOMPLEK CITTA GRAHA
JL. PANJANG NO.26 BLOK 2L, KEDOYA
SELATAN, KEBON JERUK, JAKARTA BARAT

ATTN: ENDANG

DATE : APRIL 17, 2023

SUBMITTED SAMPLE SAID TO BE:

SAMPLE DESCRIPTION : FABRIC OF NUVRINO
BUYERS COMPANY NAME : PT BERKAT UNGGUL PRATAMA
COUNTRY OF ORIGIN : CHINA, TAIWAN, INDONESIA
TESTING STAGE : PRODUCTION SAMPLE

TESTS CONDUCTED:

AS REQUESTED BY THE APPLICANT, FOR DETAILS REFER TO ATTACHED PAGES.


CONCLUSION:

<u>TESTED SAMPLE</u>	<u>STANDARD</u>	<u>RESULT</u>
SUBMITTED SAMPLE	CALIFORNIA TECHNICAL BULLETIN 117-2013 SECTION 1 FOR TESTING OF COVER FABRIC MATERIAL USED IN UPHOLSTERED FURNITURE	PASS

Remark:

Test was conducted with red color as top surface per client confirmation. (See EXH. #1-2)

PREPARED AND CHECKED BY:
FOR INTERTEK INDONESIA



TAUFIQ URAKHMAN
HARDLINE LAB MANAGER

RT/AK/IA/RM/IS/DN

The report shall not be reproduced wholly or in parts without written approval of the laboratory.
Except where explicitly agreed in writing, all work and services performed by Intertek is subject to our General Terms and Conditions.
For the complete term and condition, please visit : <http://www.intertek.com/terms/>

IUS – TR.HL – 001

PT. Intertek Utama Services

Citrabuana Indoloka Building
Jl. Cikini IV No.2, Gondangdia
Jakarta 10330, Indonesia

Telp. (62-21) 391 8584 (Hunting), 391 8574 (Direct), Fax. (62-21) 391 8345
Hardline Laboratory:
Jakarta (62-21) 391 8574, Semarang (62-24) 762 7107 / 762 7325
Email : hardlines.indonesia@intertek.com Website: www.intertek.com



Tests Conducted:

1 Flammability Test (California Technical Bulletin 117-2013 Section 1: Cover Fabric Test):

Test Method

The apparatus and method of testing were those described in California Technical Bulletin 117-2013, Section 1, for measuring the tendency of upholstery cover fabric to smolder and contribute to fire propagation, when subjected to a smoldering ignition source.

Pass/Fail Criteria

A cover fabric is considered pass or fail based on following criteria:

1. A single mock-up test specimen fails to meet the requirements of this test procedure if any of the following criteria occurs:
 - a) The mock-up test specimen continues to smolder after the 45 minutes test duration;
 - b) A vertical char length (measured as described in step 11.9 of ASTM E1353-08a ϵ 1) of more than 1.8 inches (45 mm) develops on the cover fabric.
 - c) The mock-up test specimen transitions to open flaming.
2. The cover fabric passes the test if three mock-up specimens pass the test. i.e., the cigarettes burn their full length and the mock-ups are no longer smoldering.
3. If more than one specimen fails, the cover fabric fails the test.
4. If any one of the three initial specimens fails, repeat the test on additional three specimens.
5. If all three additional specimens pass the test, the cover fabric passes the test. If any one of the additional three specimens fails, the cover fabric fails the test.

Test Result:

	Initial Test			Test Result
	Vertical Char length (Inches)	Mock-up specimen continues to smoulder After 45 Minutes	Mock-up test specimen transitions to open flaming	
Specimen 1	0.4	No	No	Pass
Specimen 2	0.4	No	No	Pass
Specimen 3	0.5	No	No	Pass

Conditioning: At least 24 hours in an atmosphere having a temperature of $21^{\circ} \pm 3^{\circ} \text{C}$ ($70^{\circ} \pm 5^{\circ} \text{F}$) and less than 55% relative humidity

Conditioning : Temp 20°C, RH 50%
Air Flow Rate Prior to test : 0.1 m/s
Air Flow Rate After test : 0.1 m/s

Remark: No = Was not observed

The report shall not be reproduced wholly or in parts without written approval of the laboratory. Except where explicitly agreed in writing, all work and services performed by Intertek is subject to our General Terms and Conditions. For the complete term and condition, please visit : <http://www.intertek.com/terms/>

IUS – TR.HL – 001

PT. Intertek Utama Services

Citrabuana Indoloka Building
Jl. Cikini IV No.2, Gondangdia
Jakarta 10330, Indonesia

Telp. (62-21) 391 8584 (Hunting), 391 8574 (Direct), Fax. (62-21) 391 8345
Hardline Laboratory:
Jakarta (62-21) 391 8574, Semarang (62-24) 762 7107 / 762 7325
Email : hardlines.indonesia@intertek.com Website: www.intertek.com



Date Sample Received : April 11, 2023
Date Modified : April 17, 2023
Testing Period : April 11, 2023 to April 17, 2023

END OF REPORT

This report is made solely on the basis of your instructions and/or information and materials supplied by you. It is not intended to be a recommendation for any particular course of action. Intertek does not accept a duty of care or any other responsibility to any person other than the Client in respect of this report and only accepts liability to the Client insofar as is expressly contained in the terms and conditions governing Intertek's provision of services to you. Intertek makes no warranties or representations either express or implied with respect to this report save as provided for in those terms and conditions. We have aimed to conduct the Review on a diligent and careful basis and we do not accept any liability to you for any loss arising out of or in connection with this report, in contract, tort, by statute or otherwise, except in the event of our gross negligence or wilful misconduct.

The report shall not be reproduced wholly or in parts without written approval of the laboratory.
Except where explicitly agreed in writing, all work and services performed by Intertek is subject to our General Terms and Conditions.
For the complete term and condition, please visit : <http://www.intertek.com/terms/>

IUS – TR.HL – 001

PT. Intertek Utama Services Citrabuana Indoloka Building
Jl. Cikini IV No.2, Gondangdia
Jakarta 10330, Indonesia

Telp. (62-21) 391 8584 (Hunting), 391 8574 (Direct), Fax. (62-21) 391 8345
Hardline Laboratory:
Jakarta (62-21) 391 8574, Semarang (62-24) 762 7107 / 762 7325
Email : hardlines.indonesia@intertek.com **Website:** www.intertek.com



Product Photo



The report shall not be reproduced wholly or in parts without written approval of the laboratory.
Except where explicitly agreed in writing, all work and services performed by Intertek is subject to our General Terms and Conditions.
For the complete term and condition, please visit : <http://www.intertek.com/terms/>

IUS – TR.HL – 001

PT. Intertek Utama Services

Citrabuana Indoloka Building
Jl. Cikini IV No.2, Gondangdia
Jakarta 10330, Indonesia

Telp. (62-21) 391 8584 (Hunting), 391 8574 (Direct), Fax. (62-21) 391 8345
Hardline Laboratory:
Jakarta (62-21) 391 8574, Semarang (62-24) 762 7107 / 762 7325
Email : hardlines.indonesia@intertek.com **Website:** www.intertek.com



CARA PERAWATAN BAHAN KULIT SINTETIK

✓ DO's

Apa yang **HARUS** dilakukan



Gunakan lap basah (lembab)
berbahan lembut untuk
membersihkan permukaan bahan



Gosok permukaan bahan secara
perlahan



Jika terkena noda dengan bahan
pewarna yang cukup pekat, usahakan
untuk membersihkan bagian tersebut
dengan lap basah sesegera mungkin



Apabila ada noda yang masih tertinggal,
gunakan pembersih khusus kulit sintetik
untuk membantu menghilangkan noda
tersebut



Simpan bahan dengan cara digulung
untuk menghindari bahan kusut
atau lecek

✗ DONT's

Apa yang **TIDAK BOLEH** dilakukan



Jangan gunakan bahan yang
kasar / tajam (seperti sikat) untuk
membersihkan permukaan kulit



Jangan gunakan produk pembersih
kimia keras yang dapat merusak
permukaan kulit seperti :
pemutih, deterjen, thinner, dll



Tidak menyimpan bahan dengan
cara dilipat ataupun ditekan dengan
barang yang berbeban berat untuk
menghindari terjadinya garis lipatan
pada bahan



Gulungan roll jangan diletakkan di posisi
berdiri/vertikal. Gulungan harus diletakkan
secara horisontal di bidang datar.



Hindari menyimpan bahan kulit di
tempat yang terkena sinar matahari
langsung atau bersuhu lembab.

Catatan:

Tinta pulpen, spidol permanen, bahan jeans dan bahan berwarna kuat lainnya kemungkinan besar akan sulit atau tidak bisa dibersihkan secara sempurna, terutama pada bahan kulit berwarna terang

